

# Arog Vertikal

## Datenblatt


### Einlagig



Abmessung (mm)		Anzahl Rohre	Naben- abstand (mm)	Wärmeleistung (W)		Gewicht (kg)	Wasserkapazität (Lt)
Breite (W)	Höhe (H)			EN442 75/65 - 20 C	EN442 90/70 - 20 C		
301	1200	4	50	360	425	10,40	2,93
378	1200	5		445	526	12,80	3,67
455	1200	6		529	626	15,10	4,42
532	1200	7		614	726	17,50	5,16
609	1200	8		703	831	19,90	5,90
301	1600	4	50	466	551	13,50	3,76
378	1600	5		572	676	16,50	4,72
455	1600	6		686	811	19,50	5,67
532	1600	7		805	951	22,50	6,63
609	1600	8		915	1081	25,50	7,58
301	1800	4	50	529	626	14,70	4,20
378	1800	5		635	751	18,20	5,24
455	1800	6		783	926	21,50	6,30
532	1800	7		889	1051	25,00	7,36
609	1800	8		1038	1226	28,50	8,41

# Arog Vertikal einlagig

Anschlüsse

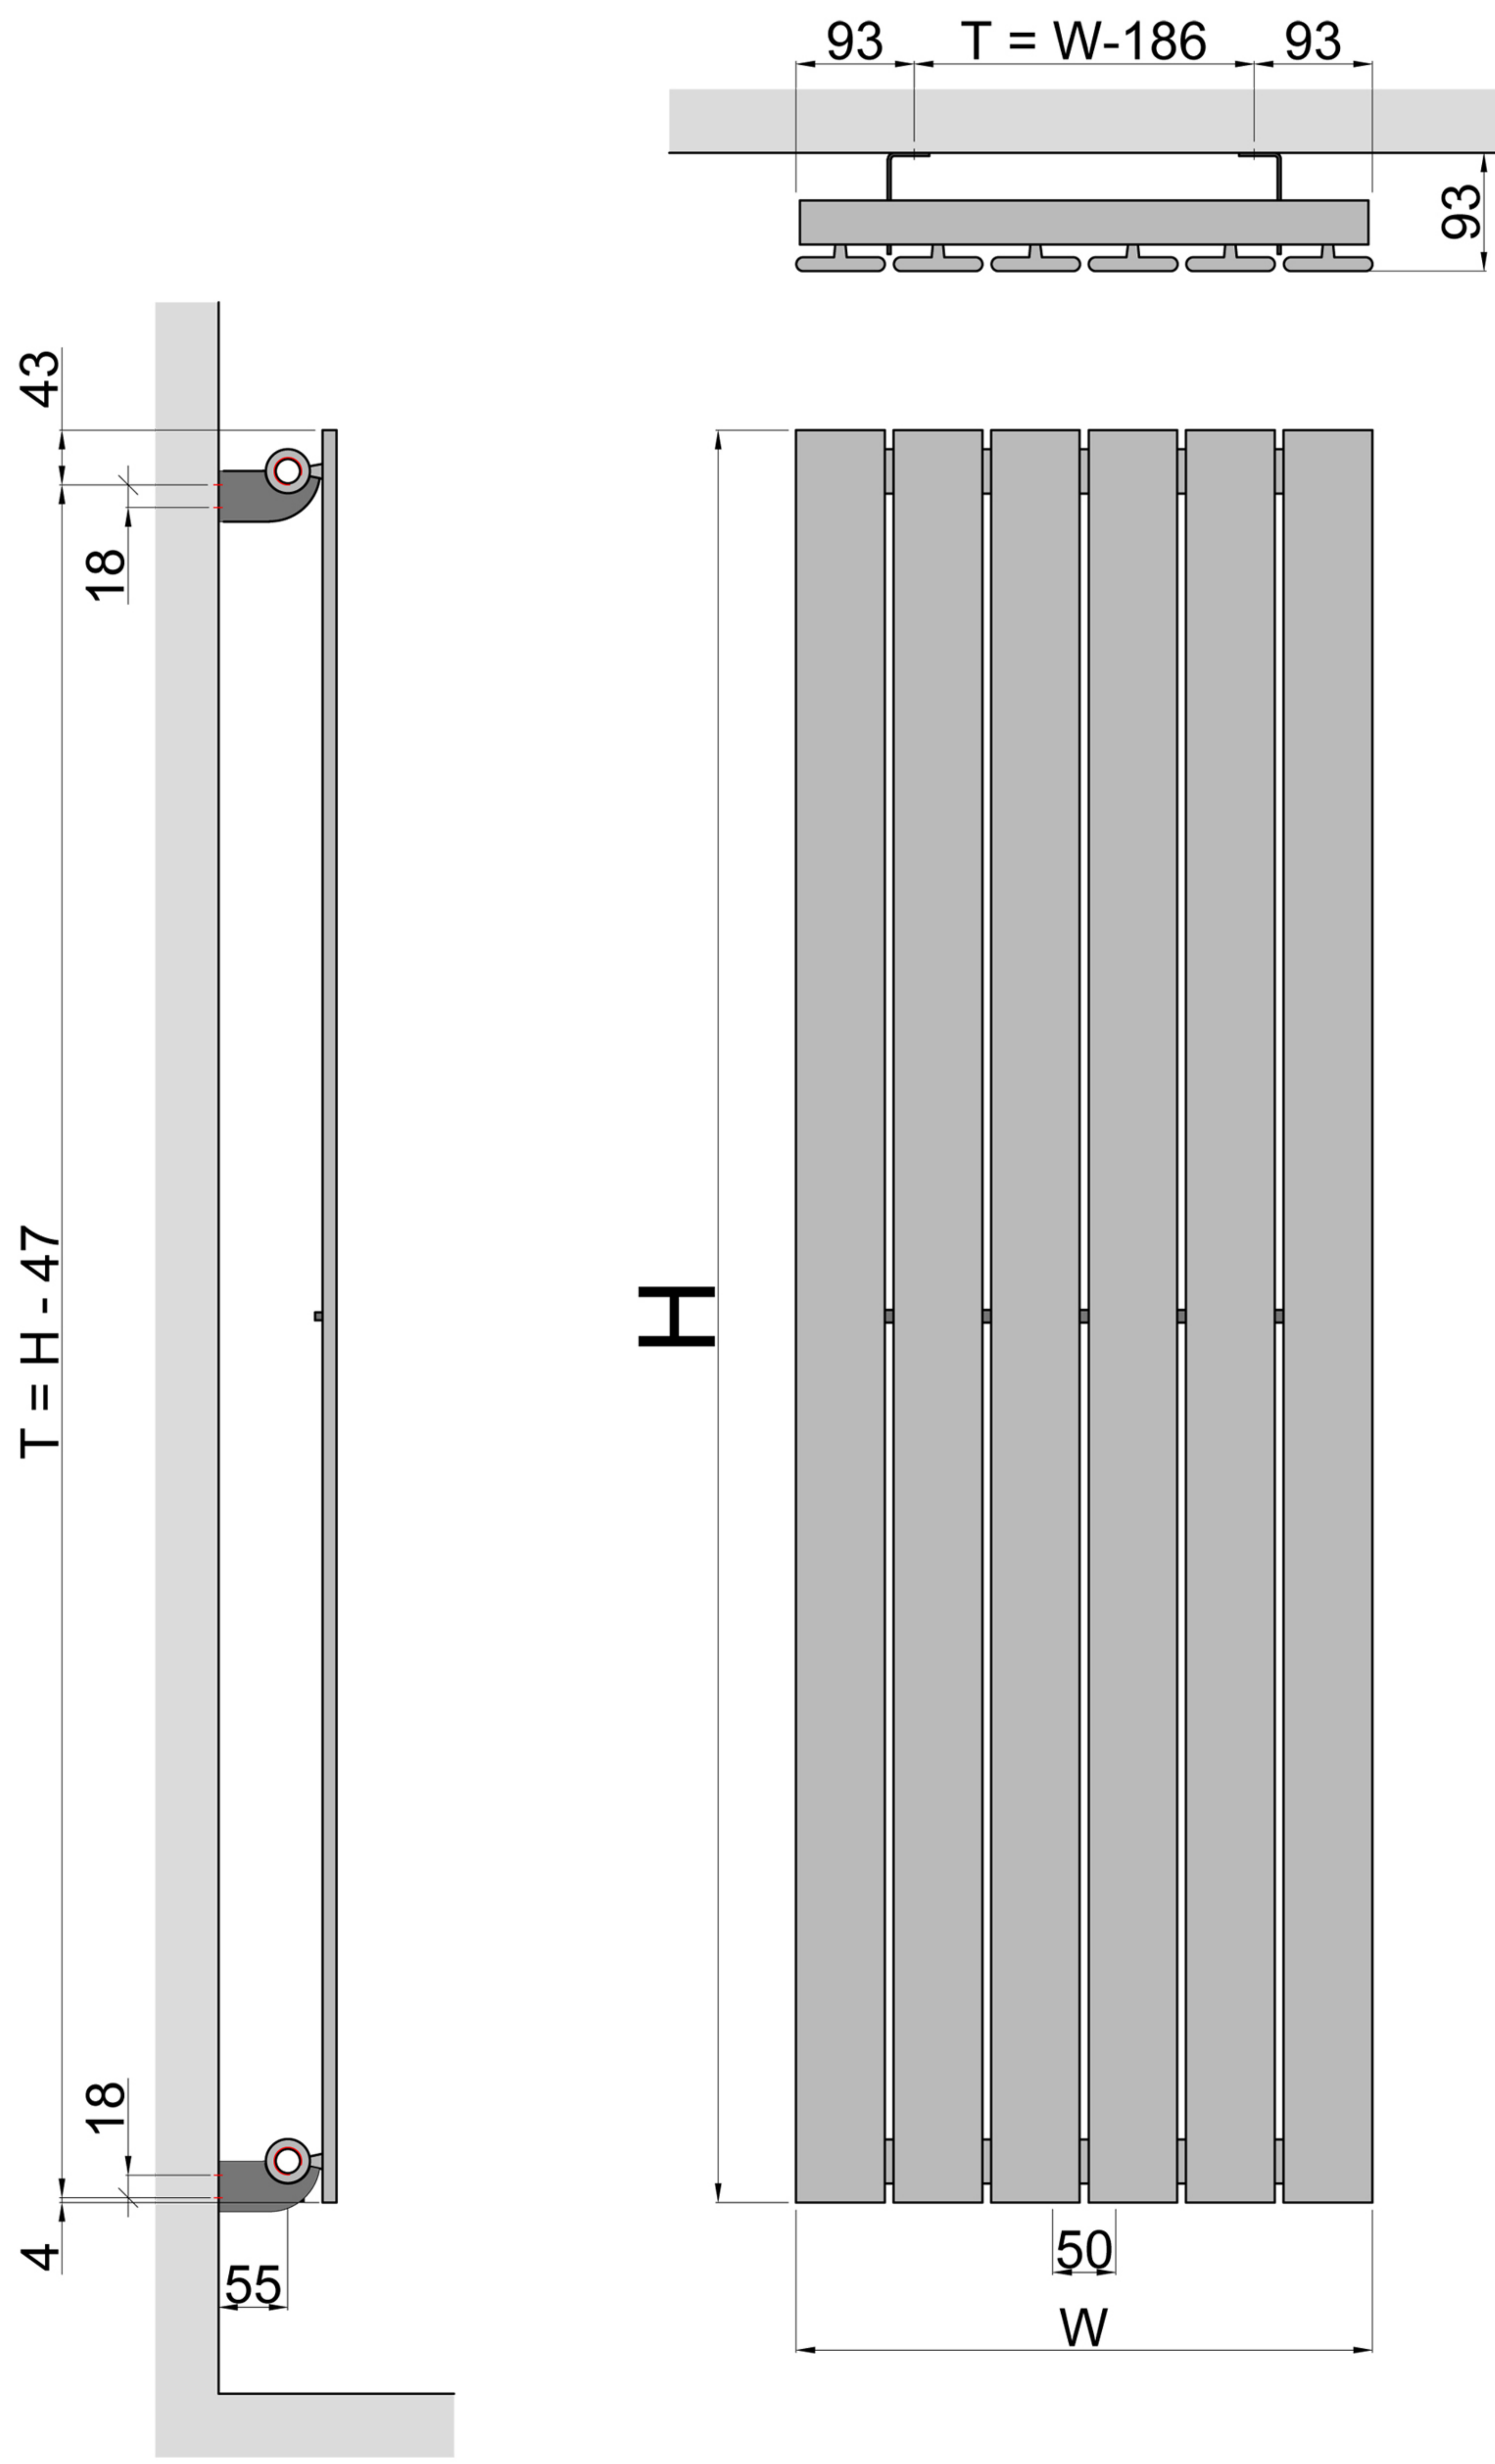

# Arog Vertikal

Anschlüsse

