
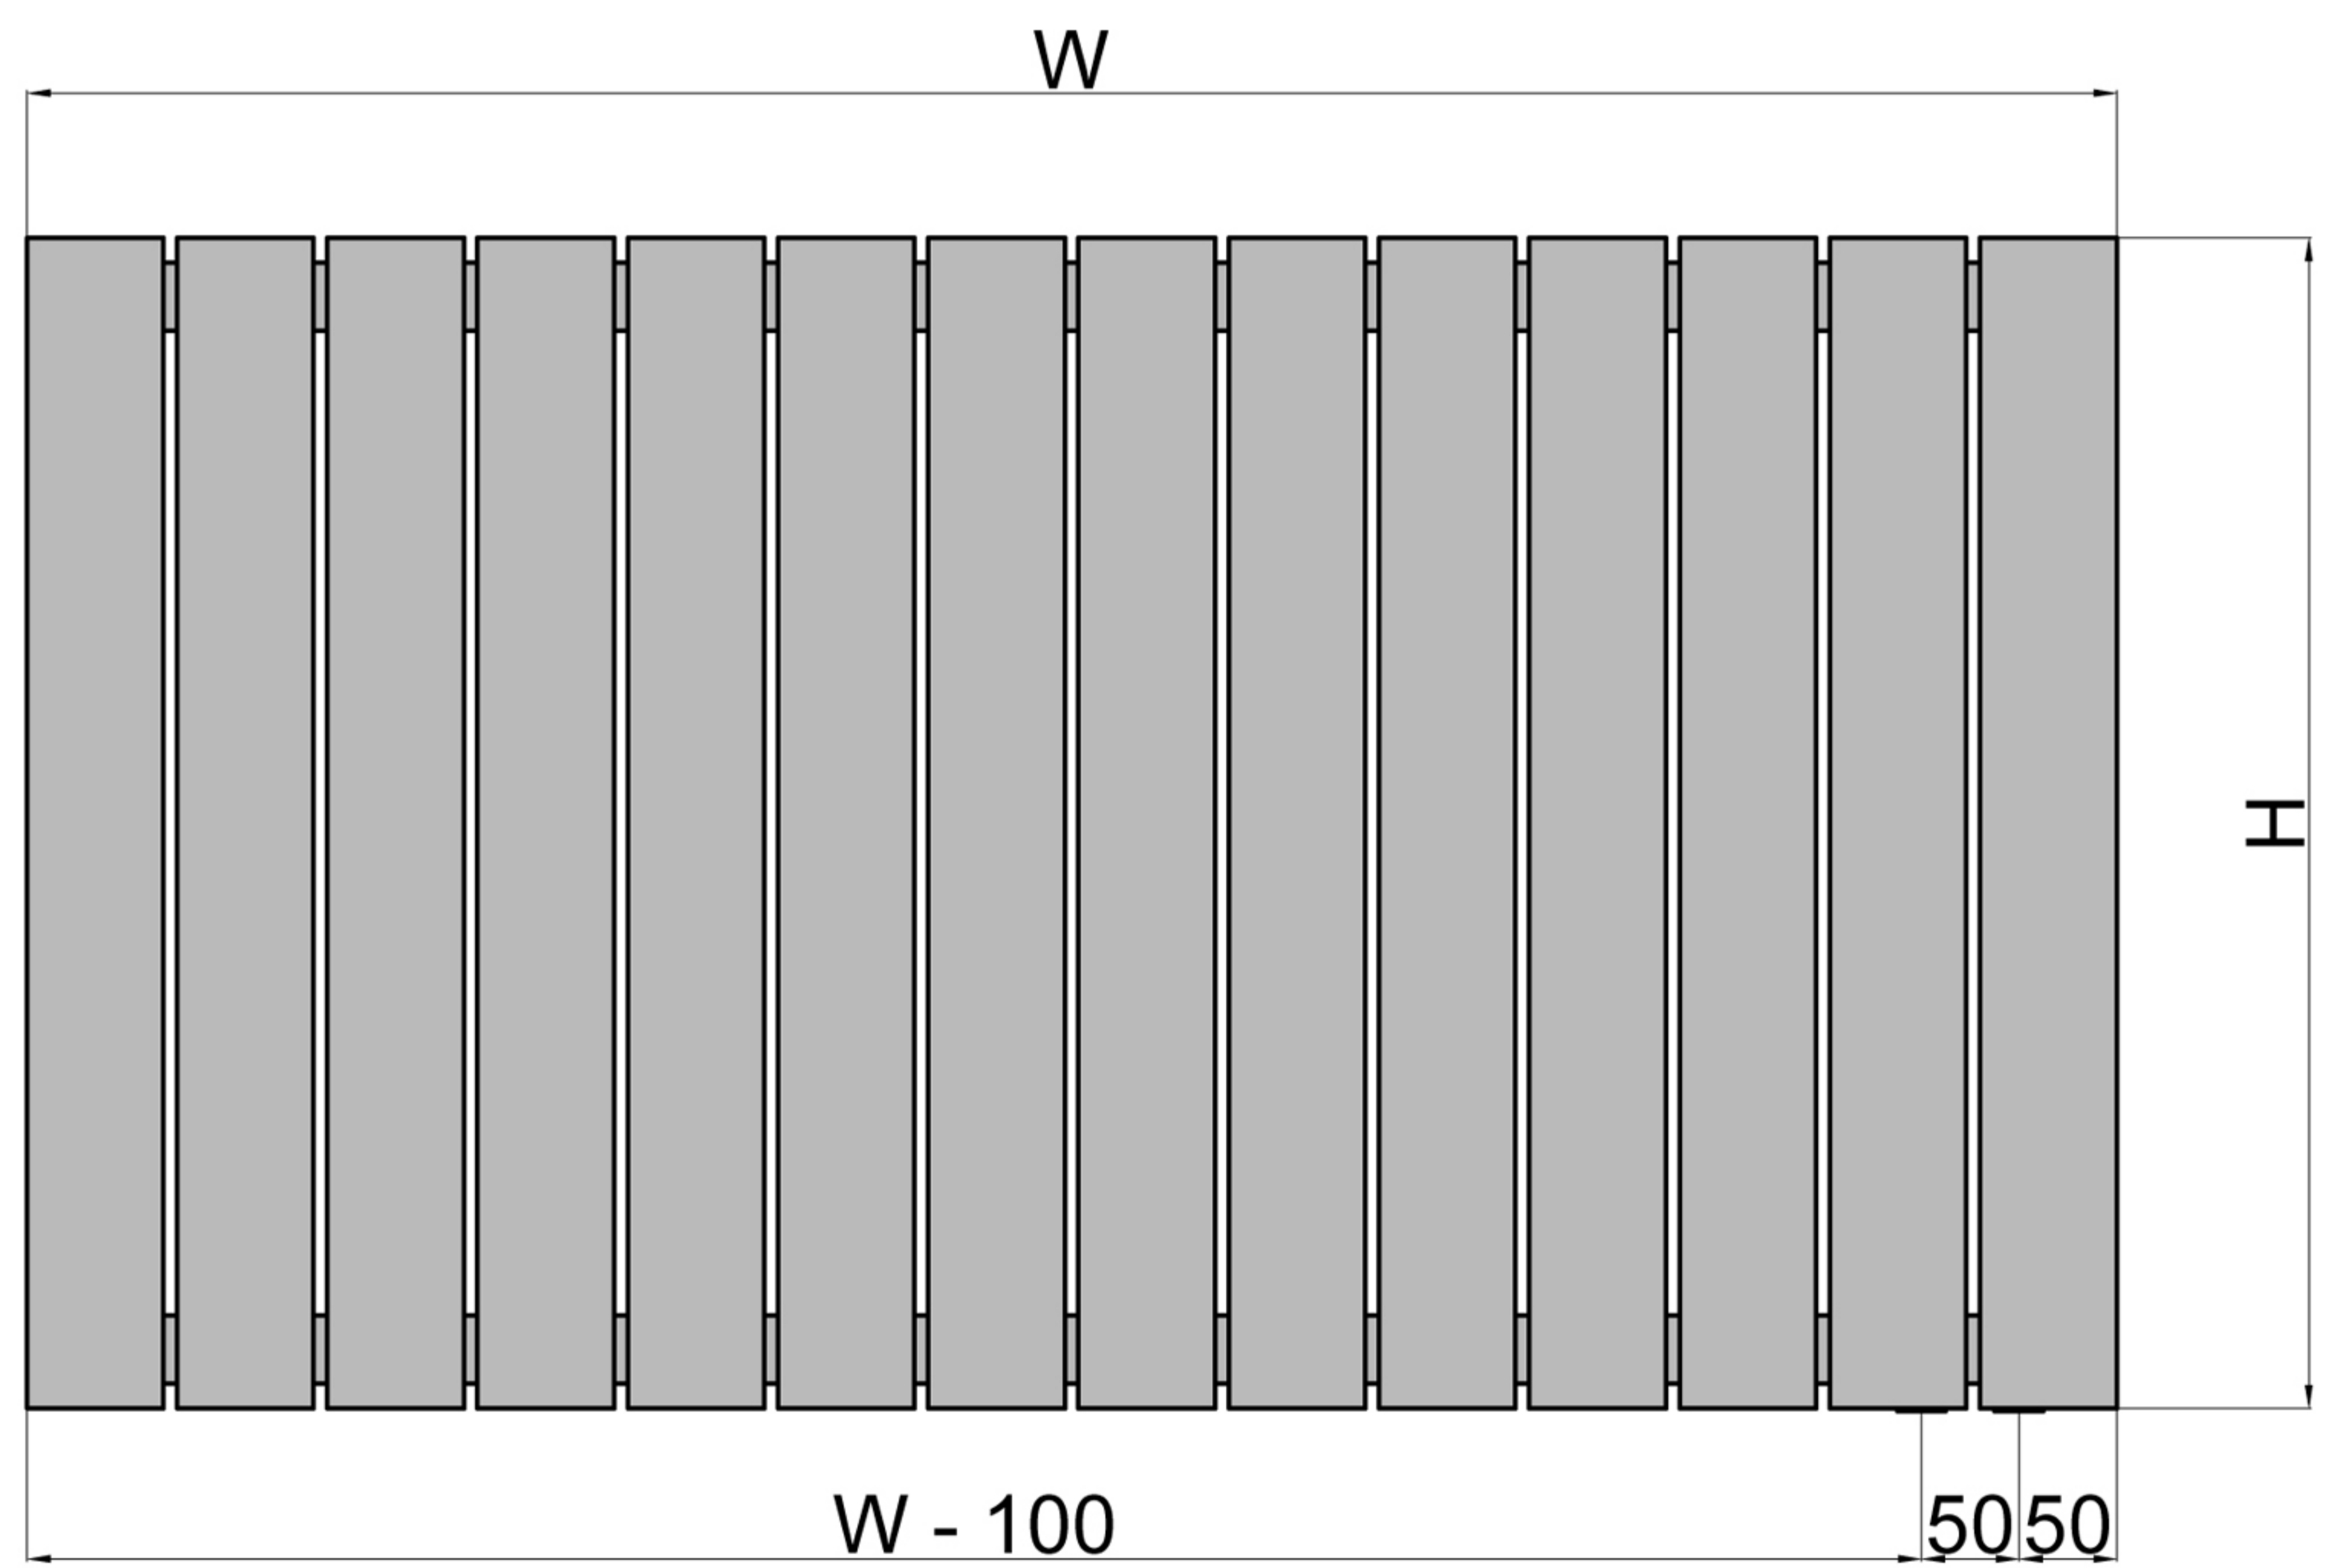
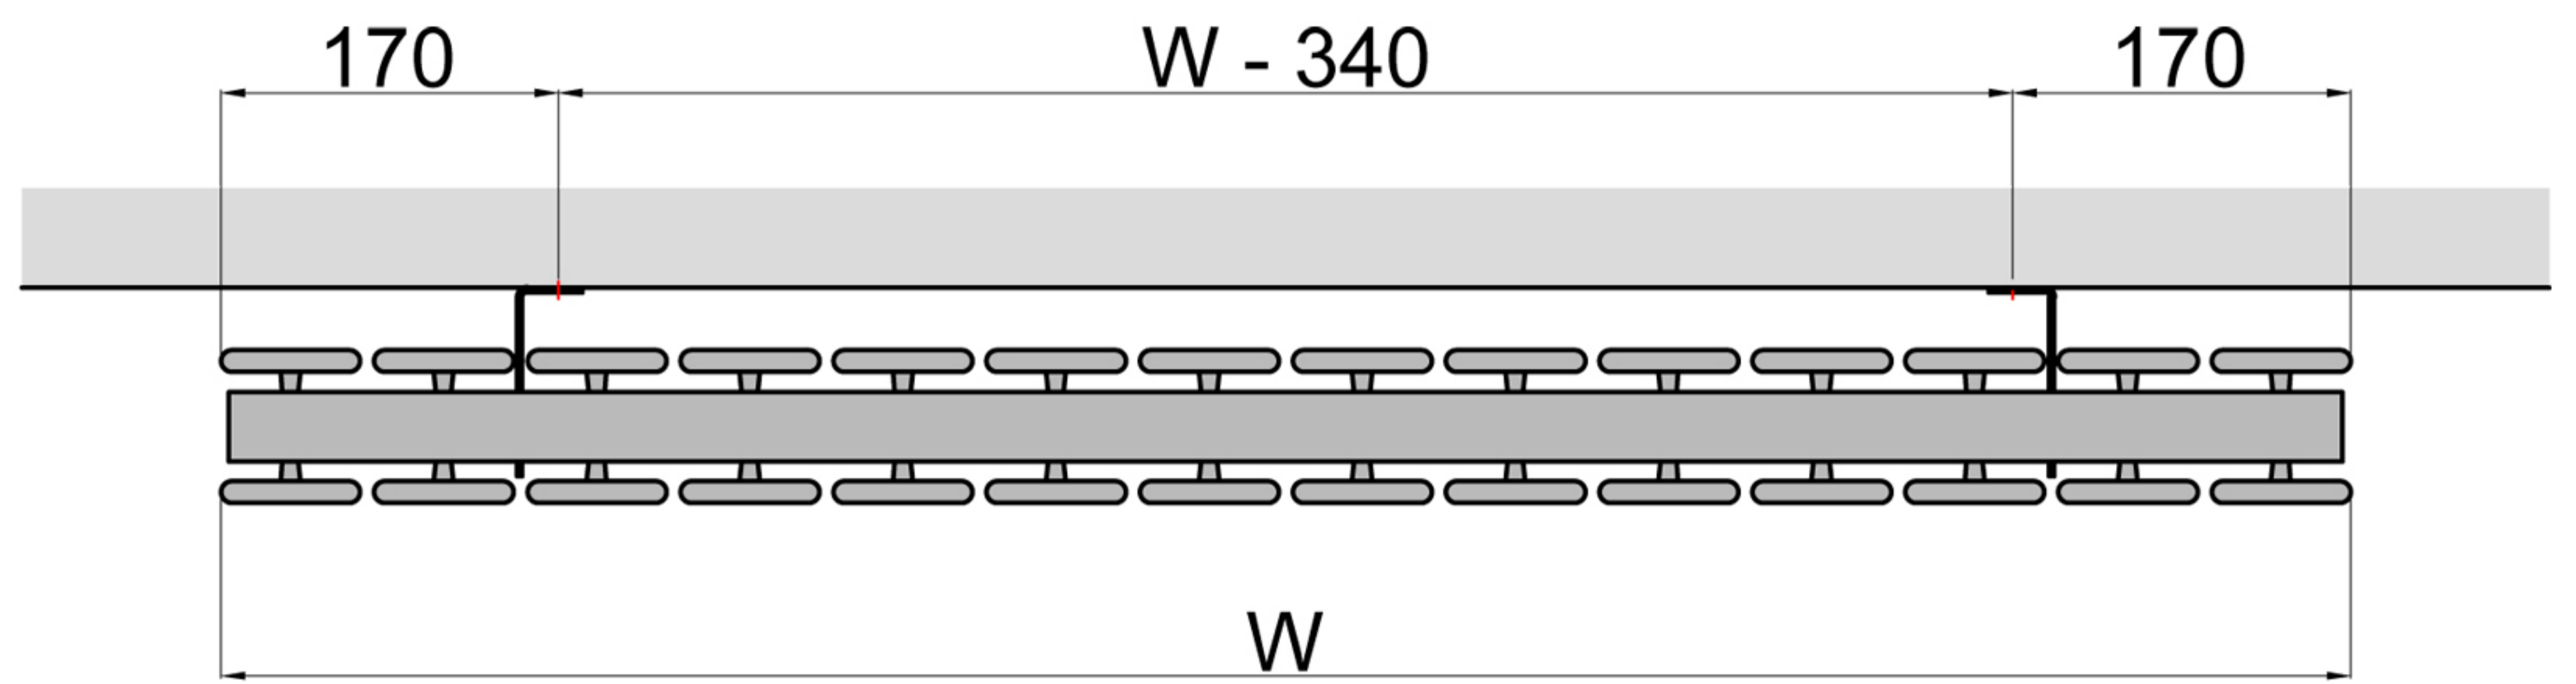


COMPACT DOUBLE

Abmessung (mm)		Anzahl Rohre	Nabenabstand (mm)	Wärmeleistung (W)			Gewicht (kg)	Wasserkapazität (Lt)
Breite (W)	Höhe (H)			Farbe				
				EN442 55/45 - 20 C	EN442 75/65 - 20 C	EN442 90/70 - 20 C		
609	500	16	(H-50) & 50	311	569	706	18,21	5,15
840	500	22		428	782	971	25,05	7,09
1071	500	28		544	996	1235	31,89	9,02
1225	500	32		622	1138	1412	36,45	10,32
1610	500	42		816	1494	1853	47,85	13,55
609	600	16		373	682	847	21,49	5,98
840	600	22		513	938	1164	29,56	8,24
1071	600	28		652	1194	1481	37,64	10,49
1225	600	32		746	1365	1693	43,02	11,99
1610	600	42		979	1791	2222	56,47	15,74

Arog Horizontal Doppellagig



Technische Zeichnung

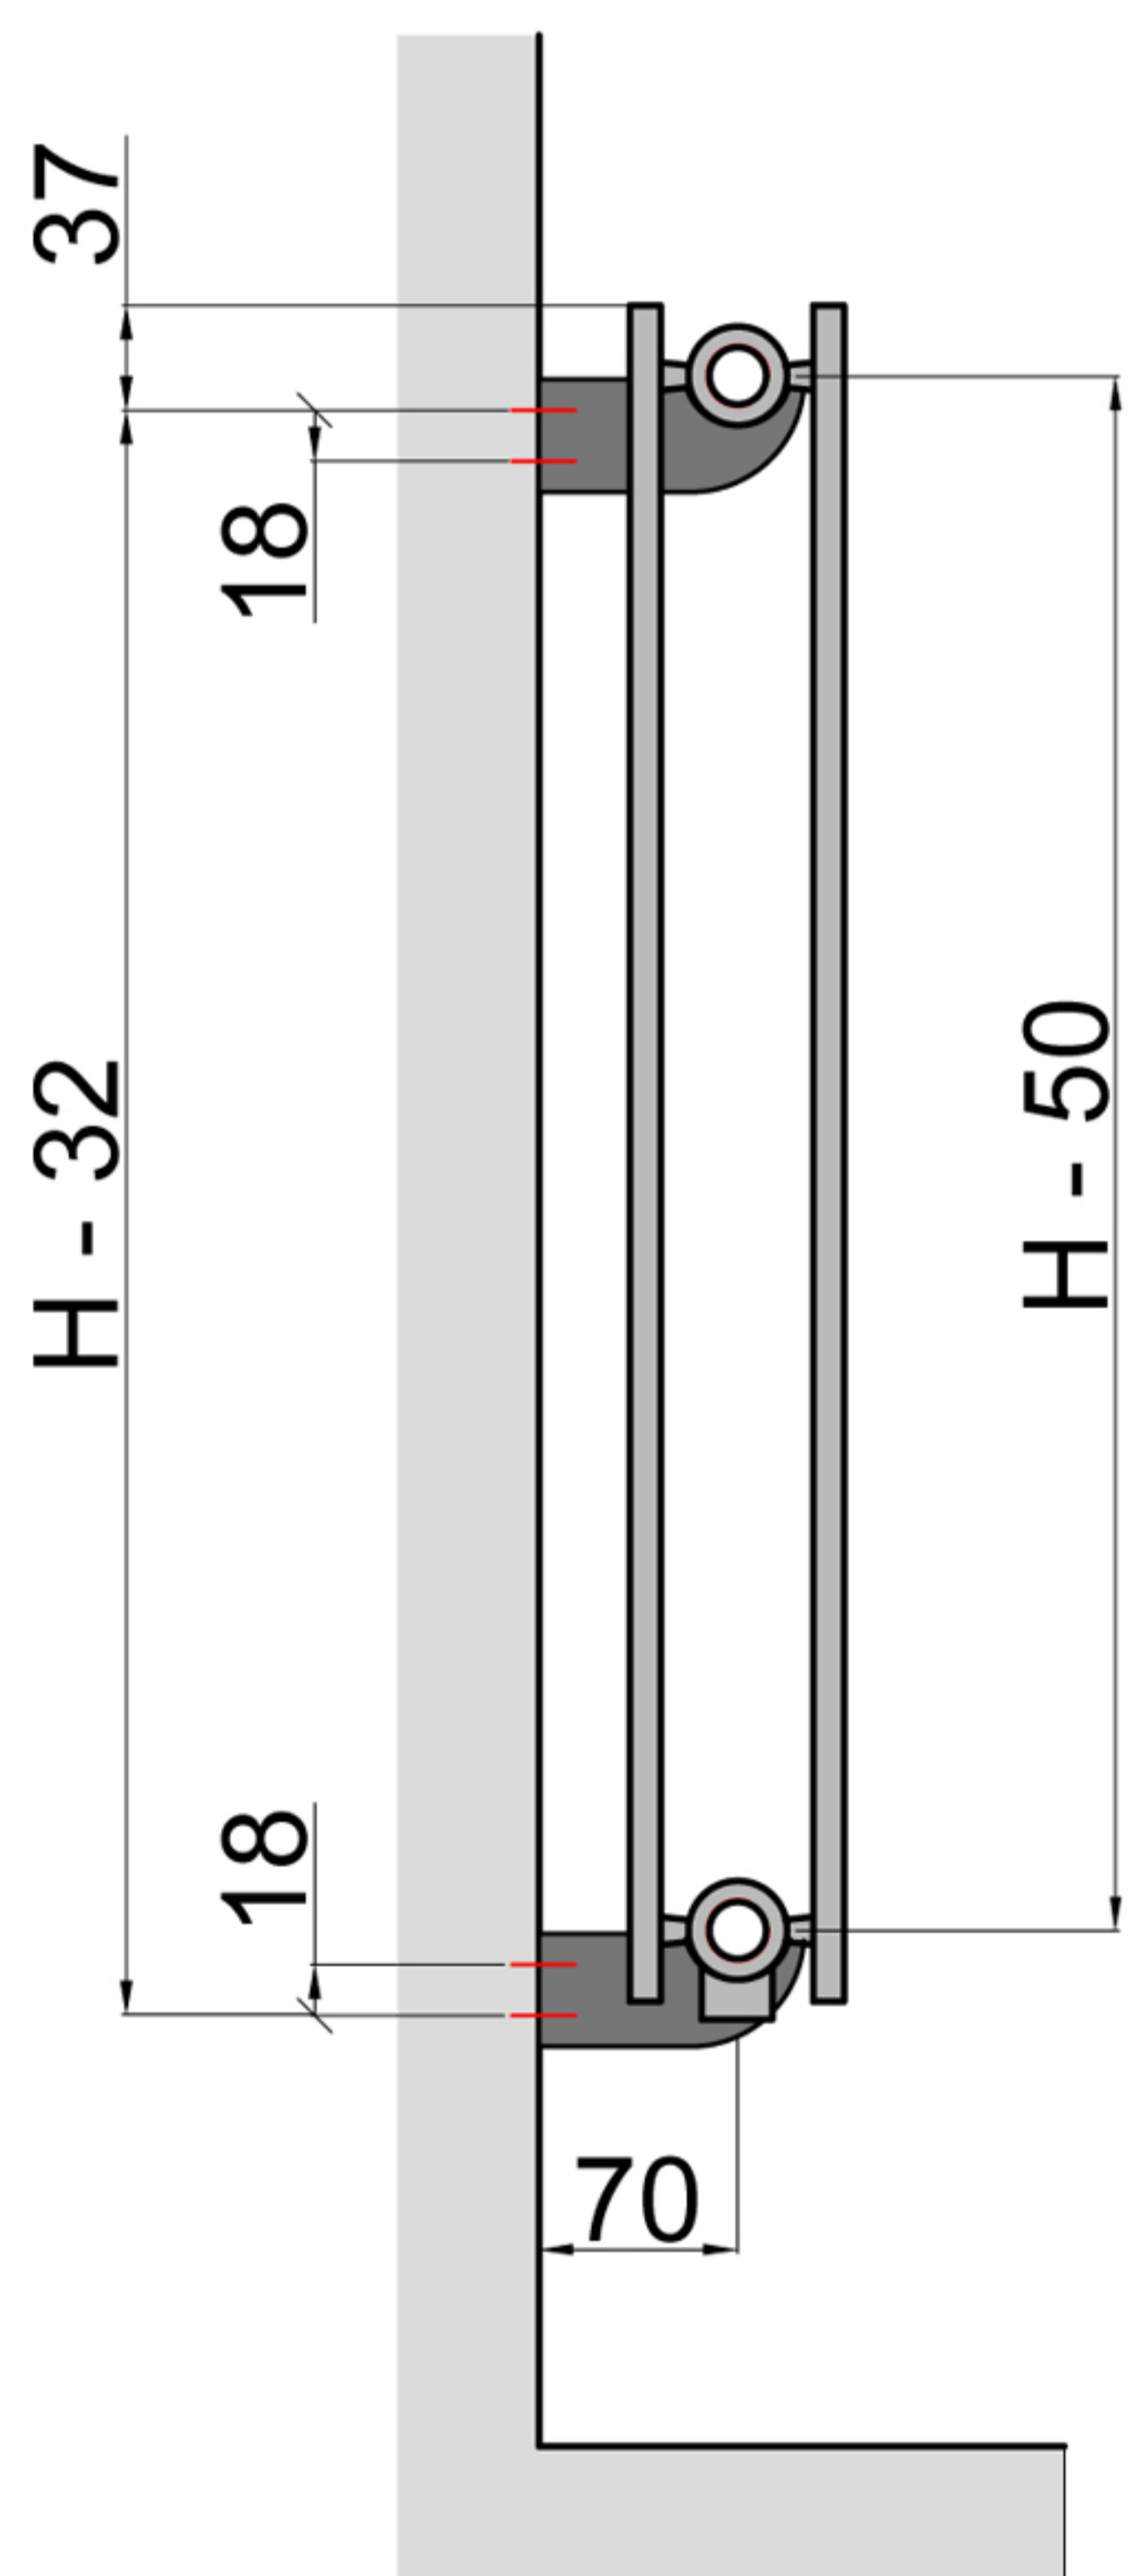

Arog Horizontal Doppellagig

Technische Zeichnung




Höhe: 600 mm. Breite: 840 mm.

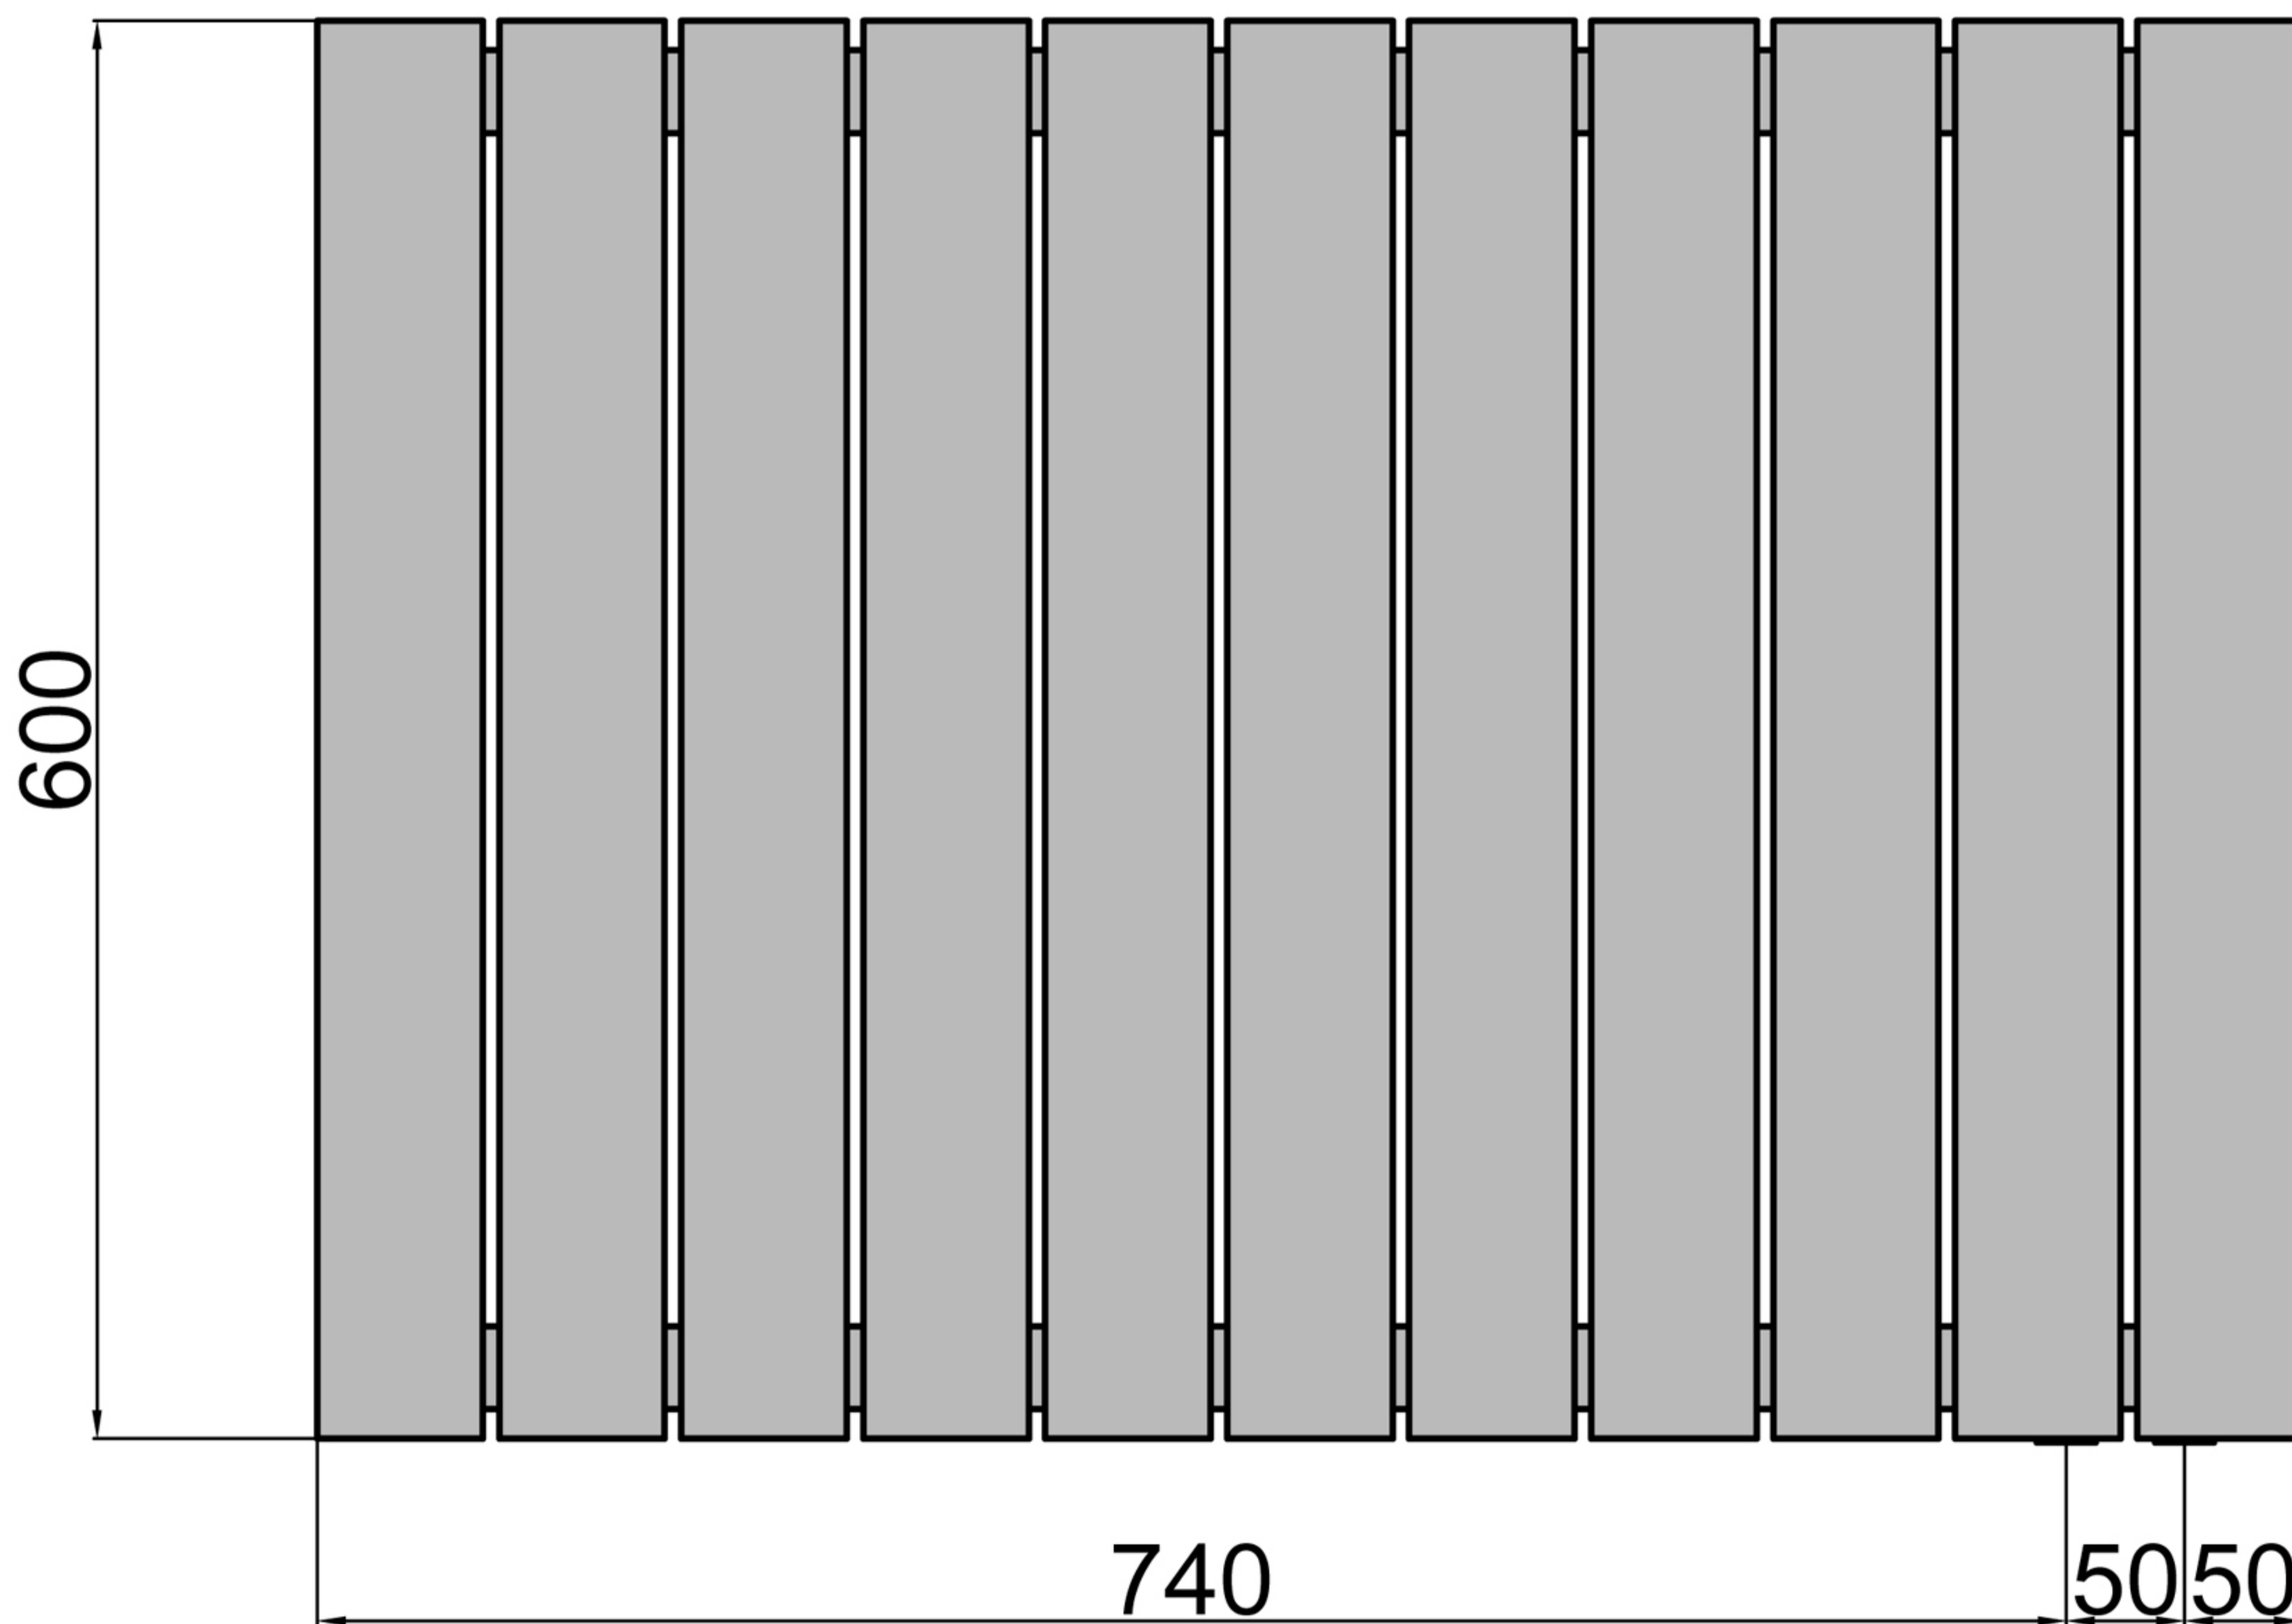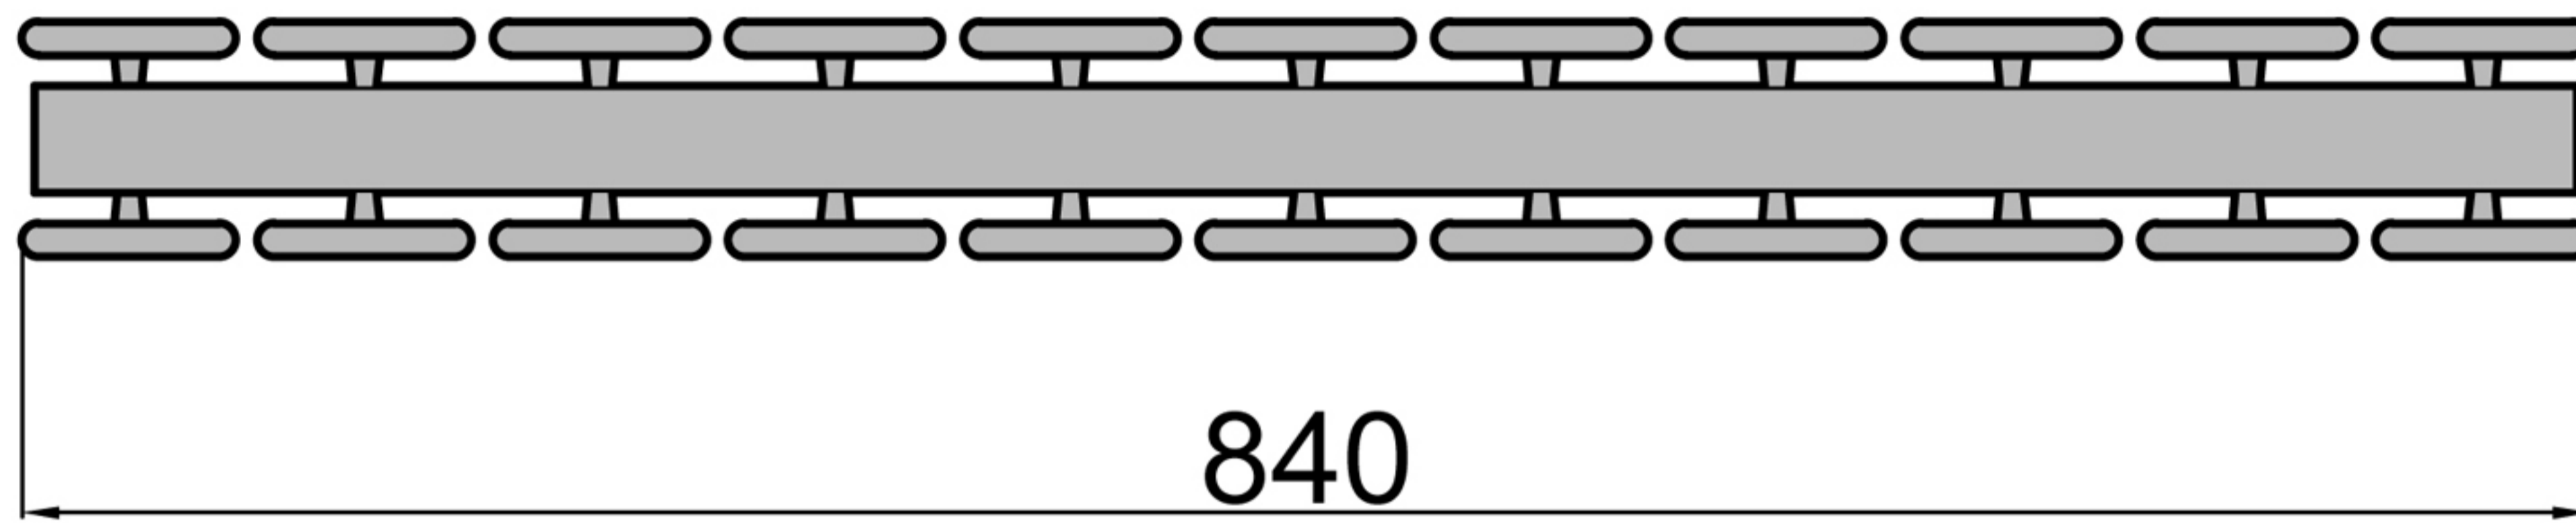

Arog Horizontal Doppellagig

Technische Zeichnung




Höhe: 600 mm. Breite: 1071 mm.

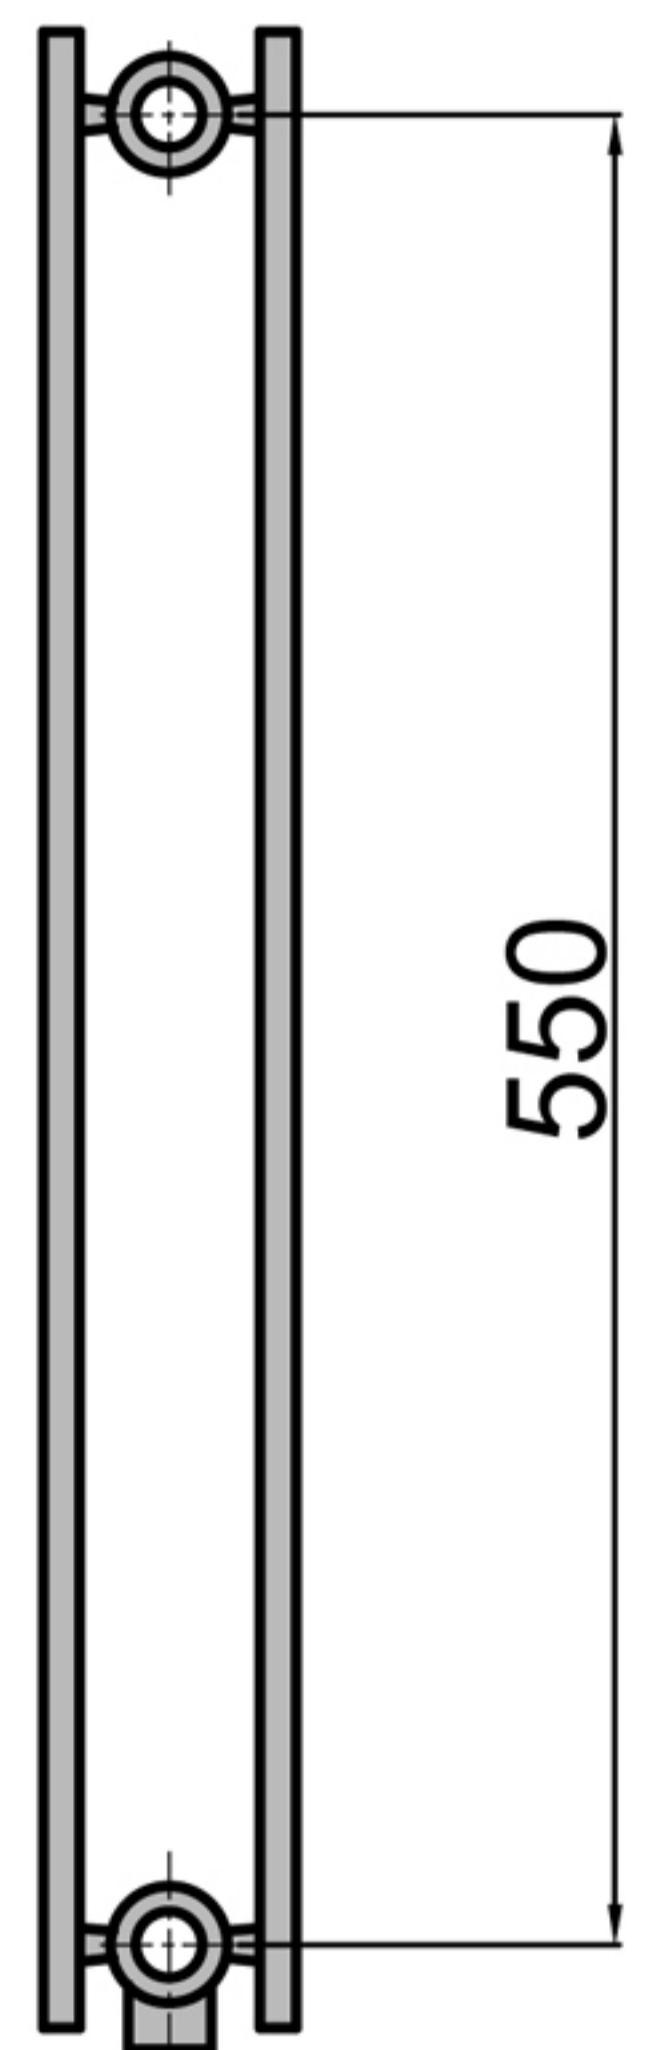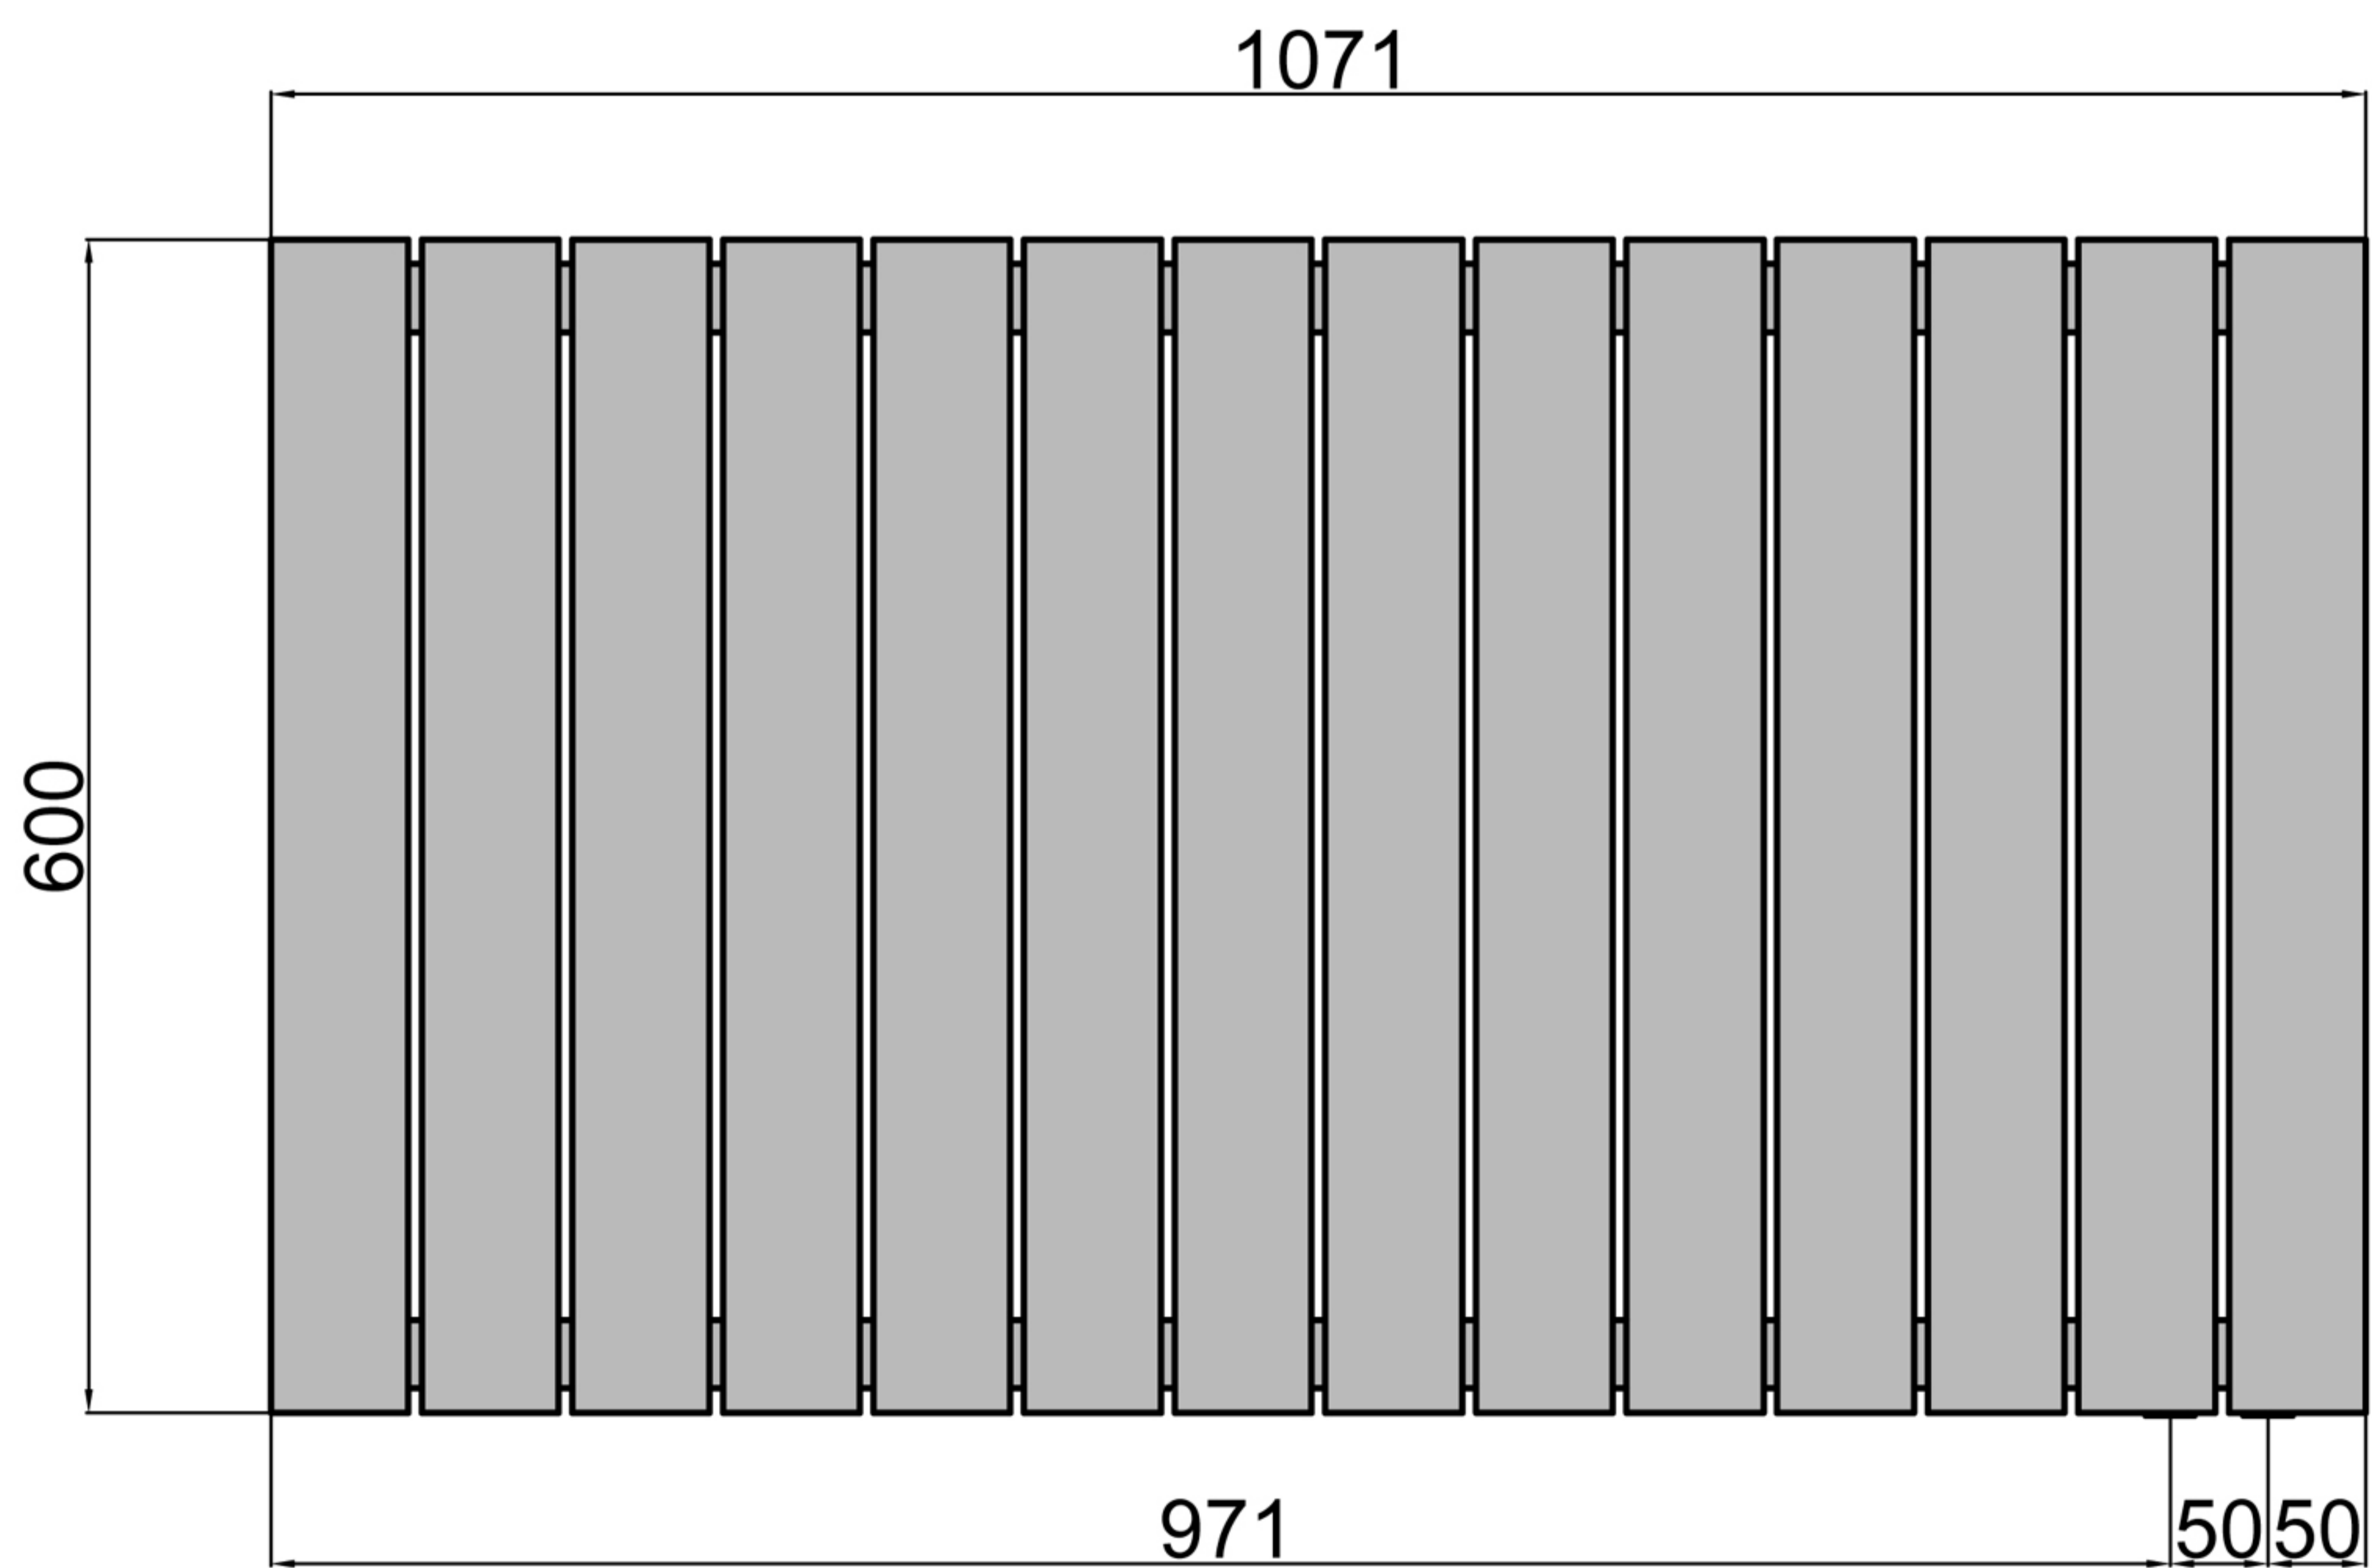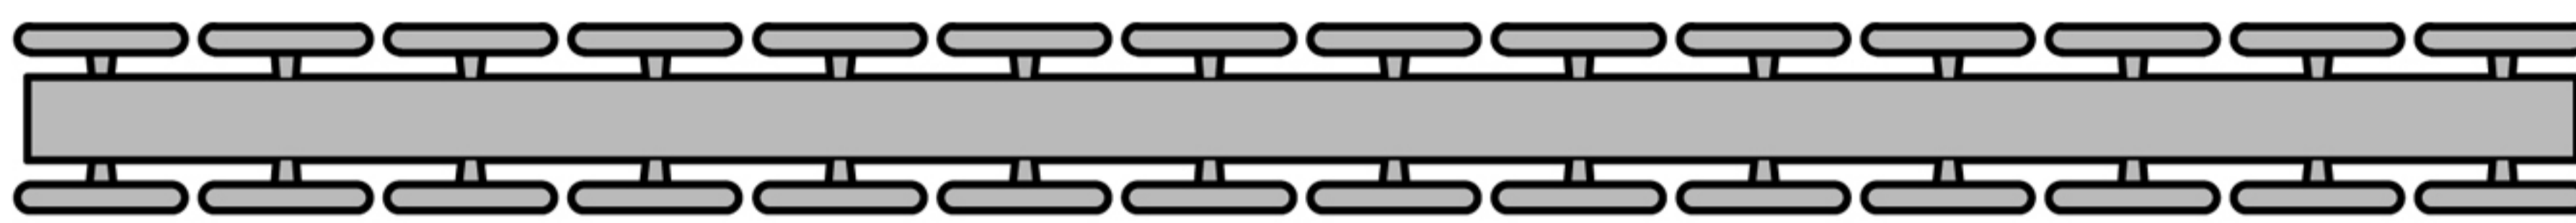

Arog Horizontal Doppellagig

Technische Zeichnung

Höhe: 600 mm. Breite: 1225 mm.

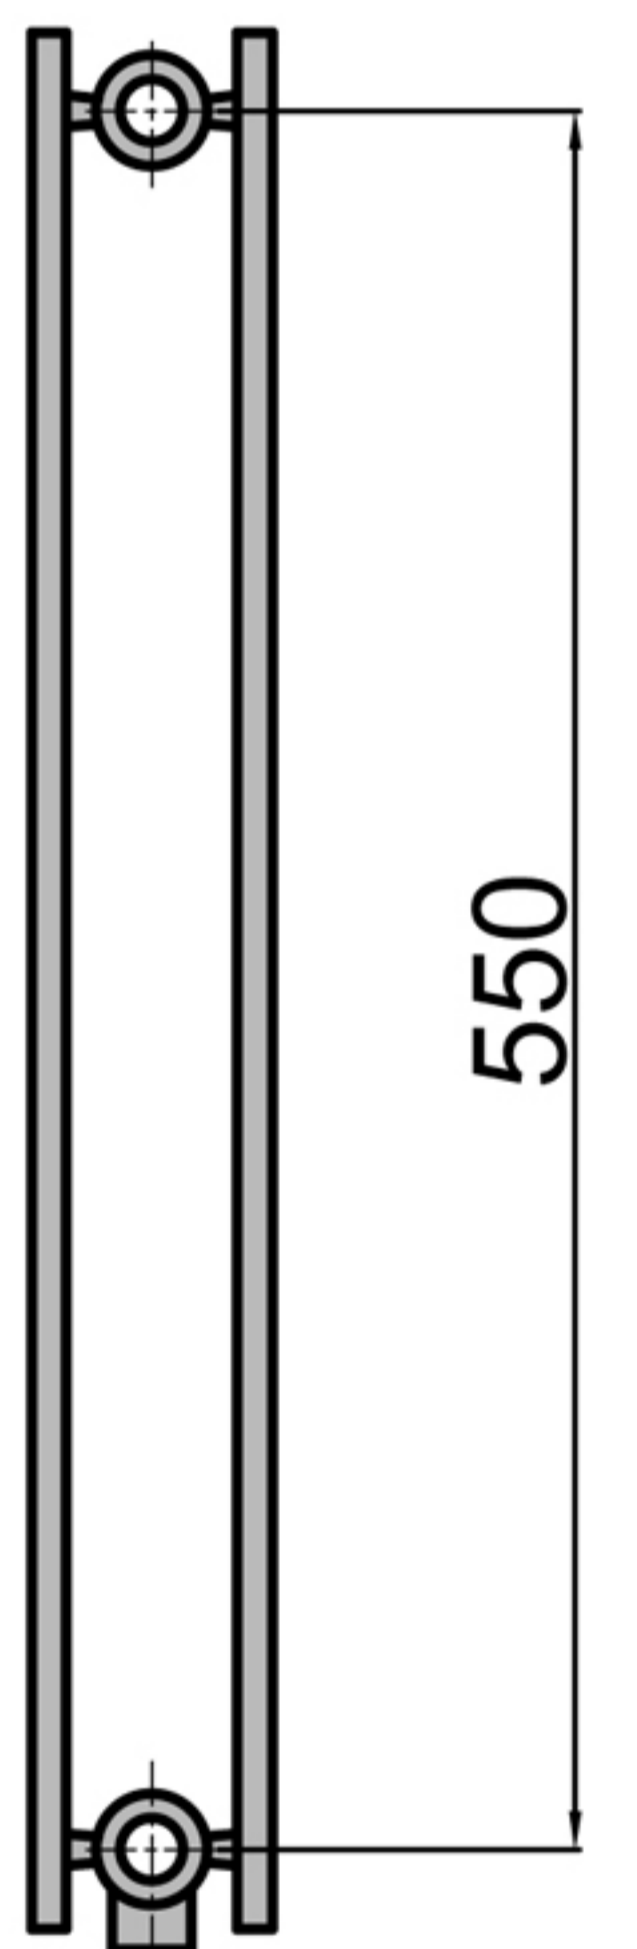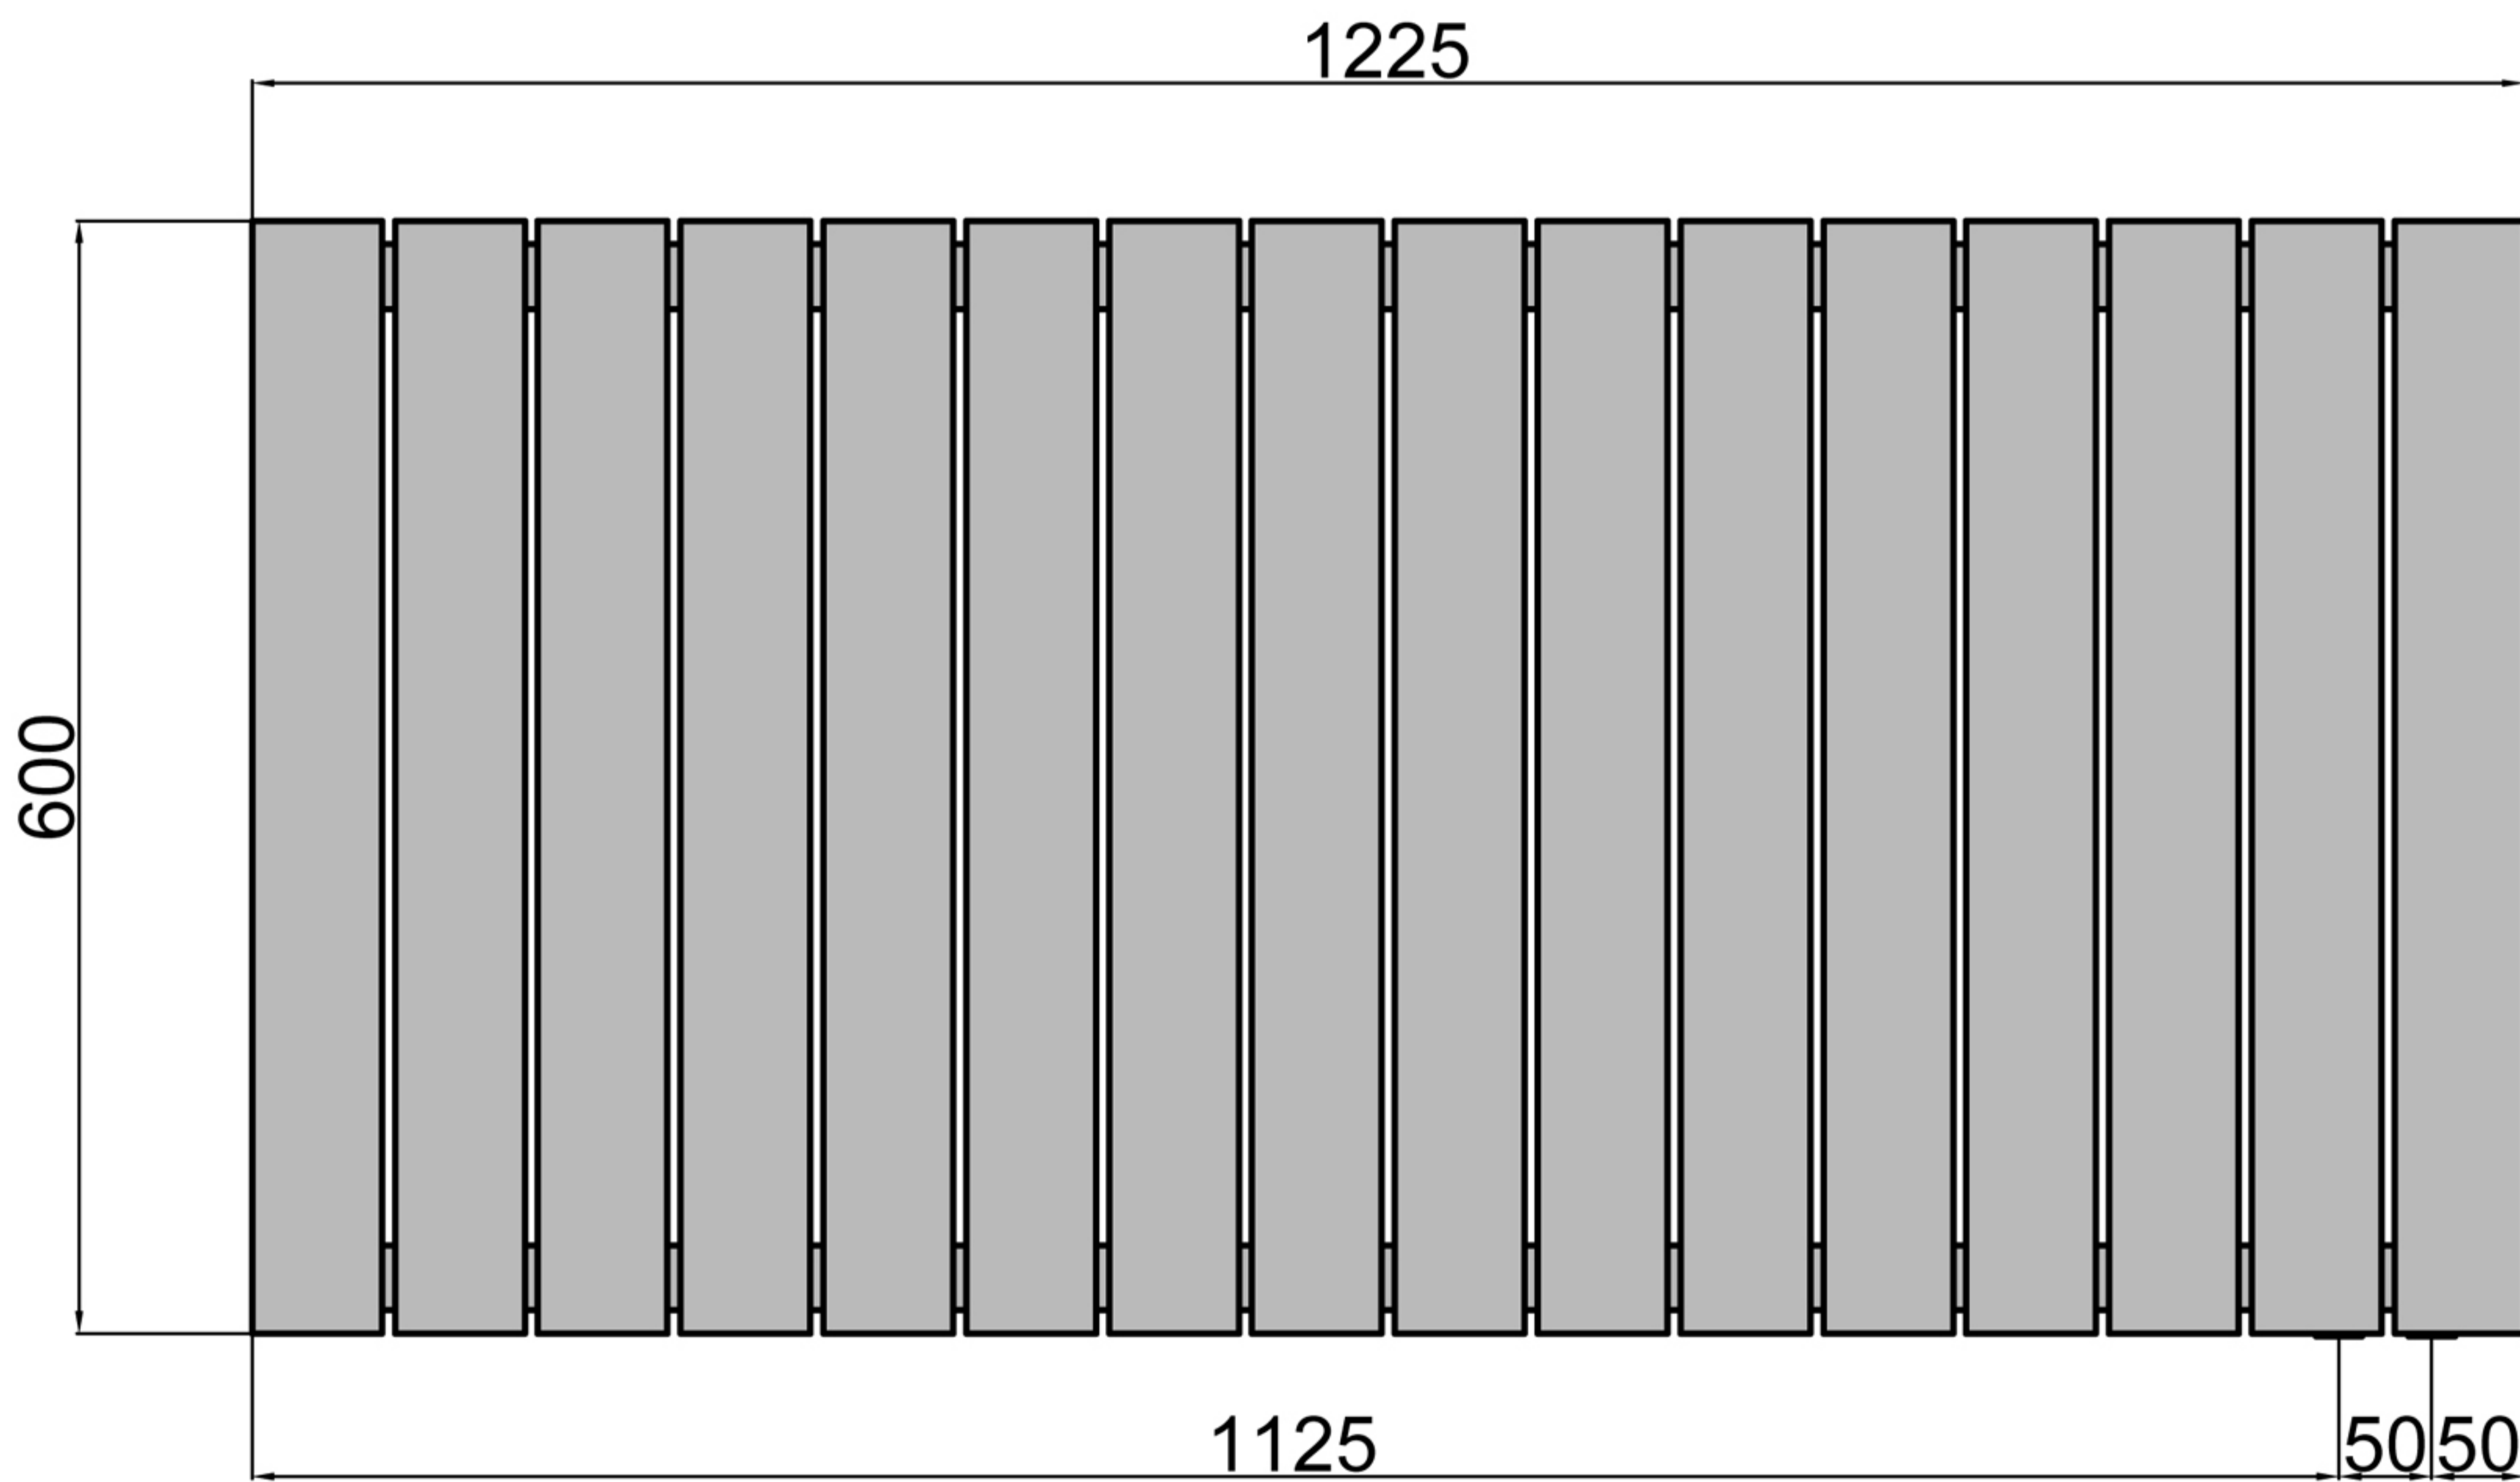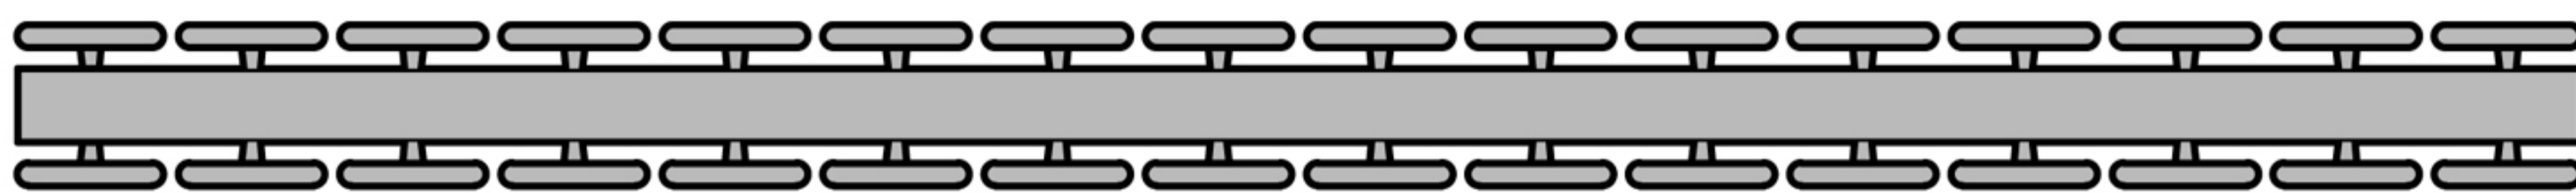

Arog Horizontal Doppellagig

Anschlüsse

